




## VERTICALLY POLARISED OMNIDIRECTIONAL ANTENNA GSM1800 VP/360/2/0 Type 1770

- ❑ **LOW PROFILE**
- ❑ **EASY BRACKET MOUNTING**

This vertically polarised omnidirectional antenna from Thales has been designed for microcell applications. The attractive styling will blend with any décor, and it can be easily mounted using the optional bracket.

### TECHNICAL SPECIFICATION

Frequency	1710-1880MHz
Gain	2dBi
VSWR	1.3:1 max
Horizontal Beamwidth	360°
Vertical Beamwidth	80°
Fixed Electrical Downtilt	0°
Power Rating	10W
Connectors	N type female
Impedance	50Ω
Dimensions (LxØ)	150 x 20 mm
Operational Wind Speed	45m/s
Survival Wind Speed	56m/s
Lightning Protection	DC grounded
Weight	80g
Temperature Range	-30°C to +70°C
Bracket	Simple wall bracket supplied

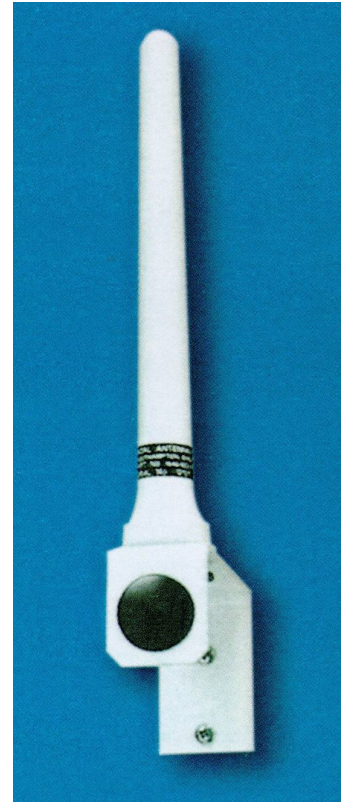

INOTEK ANTENNAS LTD

54, Ashdown Road, Chandler's Ford, Eastleigh, Hampshire, SO53 5QJ United Kingdom

Tel: +44 (0) 2380 254289, Fax: +44 (0) 191 3920133, email: sales@inotekantennas.com, www.inotekantennas.com

Inotek Antennas reserve the right to vary in detail from the description and specification in this publication. Issue: 04/07